
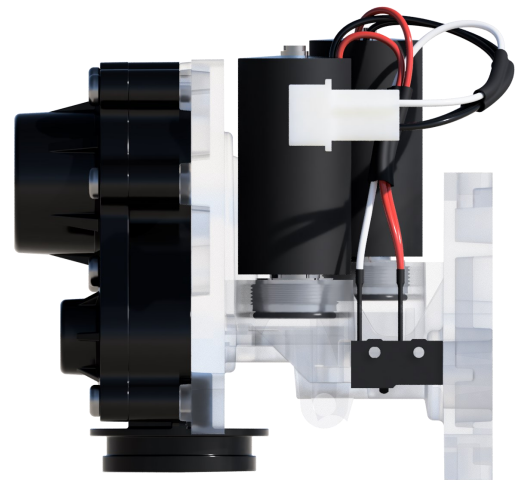


Discrete CFV Beverage Flow Control

The Discrete CFV combines the next generation of CFValve flow control with independent solenoids for modular, accurate and repeatable flow control for beverage dispensing applications. It is a drop-in replacement for CSD dispenser heads commonly in use in a wide variety of settings. It's fixed-flow configuration prevents tampering, and guarantees a consistent water/ syrup ratio.

- ▶ **Flow Rate of 3 oz/second**
- ▶ **Factory fixed flow ratio setting, eliminating the need for adjustment or brixing, no ceramics**
- ▶ **Best in class performance from high yield, diet/ light sugar to high viscosity sugared syrups**
- ▶ **Perfect foam performance regardless of syrup type; sugared, light or diet**
- ▶ **Wide range of ratio control (2.0:1 to 60.0:1)**
- ▶ **Future proof existing equipment – high ratio compatibility within the same Discrete CFV**
- ▶ **Consistent taste experience**

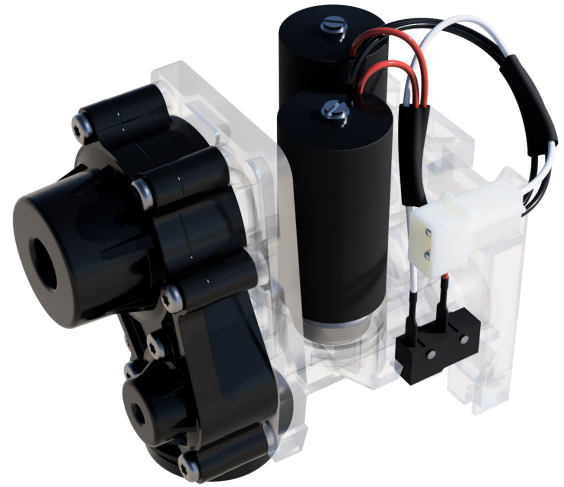

Specifications

Syrup Pressure Range	30 to 80 psi
Water Pressure Range	50 to 110 psi
Syrup Minimum Input pressure	30 psi Dynamic
Water Minimum Input pressure	60 psi Dynamic
Voltage	24VAC
Voltage max/min	+/-10%



Contact Information

Newton CFV, Inc.

T: 772-202-7783

info@newtoncfv.com

100 Sebastian Industrial Place
Sebastian, FL 32958

F: 772-388-6095

www.newtoncfv.com